

MANUFACTURER



SOLAR INNOVA GREEN TECHNOLOGY, S.L.

N.I.F.: ESB-54.627.278
 Paseo de los Molinos, 12
 03660 - NOVELDA (Alicante) SPAIN



T/F: +34965075767
 E: info@solarinnova.net
 W: www.solarinnova.net



PHOTOVOLTAIC CELLS

Series	PV-CELLS	Reference	SI-ESF-C-P156X156MM	Type	POLYCRYSTALLINE
--------	----------	-----------	---------------------	------	-----------------

INTRODUCTION

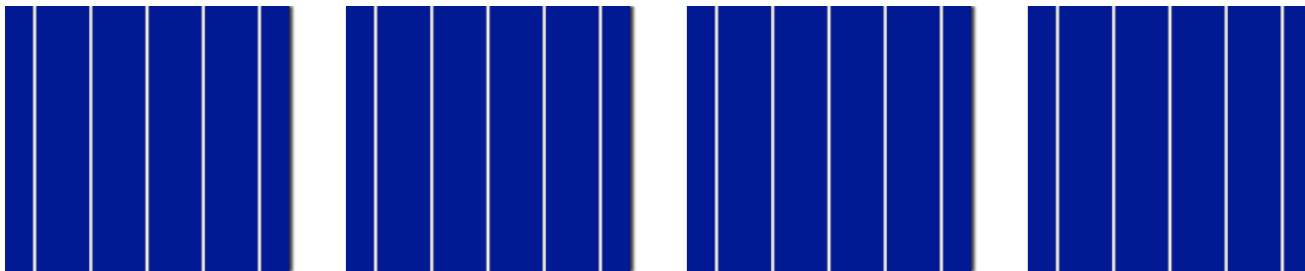

MATERIALS

Solar Innova uses the latest materials to manufacture photovoltaic cells.

USE

Our cells are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution.

EFFICIENCY

Our highly efficient polycrystalline silicon cells (they are manufactured from various crystals of very high purity silicon) to transform the energy of solar radiation into direct current electrical energy.

Each cell is electrically rated to optimize the behavior of the module.

Its performance is excellent over the entire range of light spectrum, with particularly high yields in low light situations or cloudiness to direct sunlight (diffuse radiation).

With anisotropic etched surface.

Low reverse current, high shunting resistance and dependability.

100% checked reverse current and visual appearance.

Small light-induced degradation.

PERFORMANCE

Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.

QUALITY CONTROL

We have quality control divided into three elements:

- ☑ Regular inspections allow us to guarantee the quality of the raw material.
- ☑ Quality control in the process of our manufacturing procedures.
- ☑ Quality control of finished products, we conduct through inspections and tests of reliability and performance.


WARRANTIES

Our manufacturing plants have been prepared in accordance with:

- ☑ ISO 9001, in terms of Quality Systems and Business.
- ☑ ISO 14001, in terms of Environmental Management Systems.
- ☑ ISO 45001, in terms of Management Systems Health and Safety.

CERTIFICATES

Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.

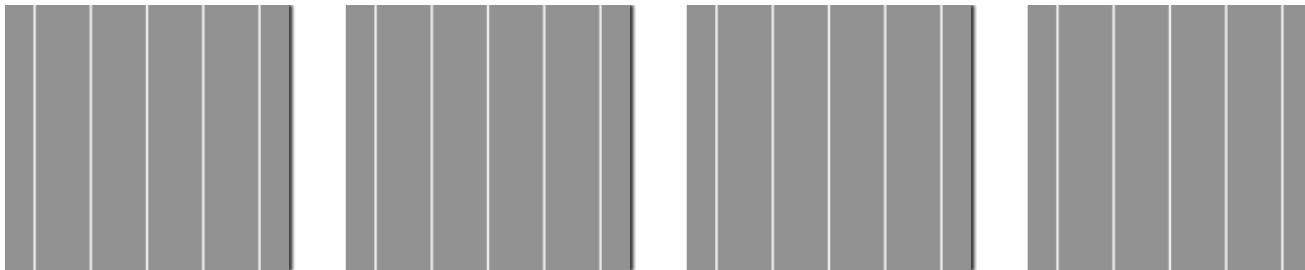

MANUFACTURER



SOLAR INNOVA GREEN TECHNOLOGY, S.L.

N.I.F.: ESB-54.627.278

Paseo de los Molinos, 12

03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767

E: info@solarinnova.net

W: www.solarinnova.net



PHOTOVOLTAIC CELLS

Series	PV-CELLS	Reference	SI-ESF-C-P156X156MM	Type	POLYCRYSTALLINE
--------	----------	-----------	---------------------	------	-----------------

PV CELLS

ELECTRICAL CHARACTERISTICS

STC CONDITIONS

Power maximum	[Pmpp]	Wp	4,64	4,67	4,69	4,72
Voltage at maximum power	[Vmpp]	V	0,56	0,56	0,55	0,55
Current at maximum power	[Impp]	A	8,33	8,35	8,56	8,58
Open circuit voltage	[Voc]	V	0,65	0,65	0,65	0,65
Short circuit current	[Isc]	A	8,99	9,01	9,13	9,15
Efficiency	[ηm]	%	18,88	19,00	19,09	19,21
Form Factor	[FF]	%	79,65	79,70	79,41	79,47

STC (Standard Test Conditions): Irradiance: 1000 W/m2 + Cell Temperature: 25° C + Air Mass: 1.5

* (Considering LID, the power range of the certification authority)

MECHANICAL CHARACTERISTICS

	WIDTH (X)		HIGH (Y)		DIAGONAL		AREA
Size	156,75	x	156,75	mm	210 mm		0,02 m2
Growth	(method)		CZ				
Conductive	(type)		P				
Dopant	(material)		Boro (B)				
Orientation			<100>				
Off orientation			<±3°				
Resistivity	(ρ)		0,5 – 3 Ω cm				
Minority carrier life	(τ d)		> 10 μS				
Oxygen content	(O2)		≤ 1 x 1018cm ³				
Carbon content	(C)		≤ 2 x 1017cm ³				
Dislocation density	(Nd)		≤ 3000/cm2				
TTV			< 30 μm				

COMPONENTS

MATERIAL	QUANTITY	THICKNESS (Z)	DESCRIPTION
sc-Si	1 units	0,01 mm	Si3N4 anti-reflection coating
Busbars	5 units	0,001 mm	CuSn6
PV Cells	0 units	0 mm	mc-Si
Aluminium	1 units	0,01 mm	PERC-Al-BSF
TOTAL		0,021 mm	

THERMAL CHARACTERISTICS

TEMPERATURE COEFFICIENTS			MONOCRYSTALLINE	
Temperature coefficient of short circuit current	α	[Isc]	0,0600	%/° C
Temperature coefficient of open circuit voltage	β	[Voc]	-0,3600	%/° C
Temperature coefficient of maximum power	γ	[Pmpp]	-0,3600	%/° C
Temperature coefficient of current at maximum power		[Impp]	0,1000	%/° C
Temperature coefficient of voltage at maximum power		[Vmpp]	-0,3800	%/° C
Nominal Module Operating Temperature		[NMOT]	+ 47 ± 2	° C

MANUFACTURER



SOLAR INNOVA GREEN TECHNOLOGY, S.L.

N.I.F.: ESB-54.627.278

Paseo de los Molinos, 12

03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767

E: info@solarinnova.net

W: www.solarinnova.net





PHOTOVOLTAIC CELLS

Series PV-CELLS Reference SI-ESF-C-P156X156MM Type POLYCRYSTALLINE

DRAWING

FRONT

REAR

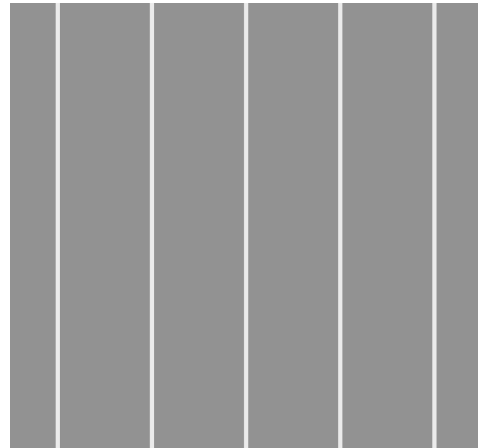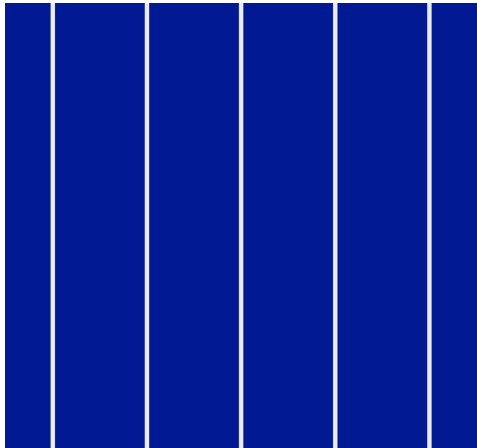

HIGH (Y) 156,75 mm


WIDTH (X) 156,75 mm

PERFORMANCE

TEMPERATURE

Temperature depending on Isc, Voc and Pmax

Isc, Voc, Pmax normalized (%)

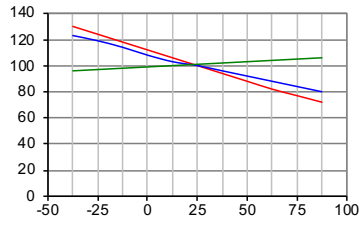


Cell temperature (°C)

--- Pmax --- Voc --- Isc

IRRADIANCE

Irradiance depending on Isc, Voc and Pmax (cell temperature: 25°C)

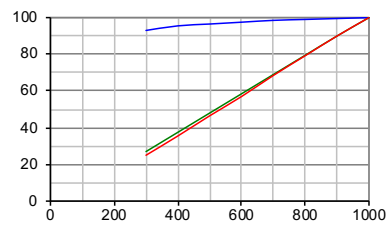


Irradiance (W/m2)

--- Voc --- Isc --- Pmax

IV-IRRADIANCE

Electrical performance (cell temperature: 25°C)


Current (A)

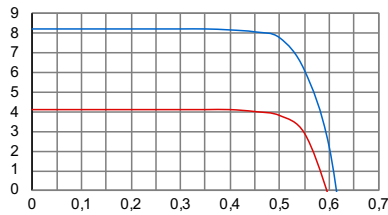

Voltage (V)

--- I-V 1000 W/m2 --- P-I 1000 W/m2
--- I-V 500 W/m2 --- P-I 500 W/m2

SPECTRAL RESPONSE

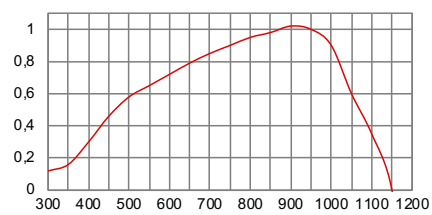

Wavelength (nm)

Power (W)

INTENSITY DEPENDENCE

Intensity	(W/m2)	1000	900	800	500	300	200
Power	[Pmpp] Wp	1	0,897	0,796	0,490	0,288	0,186
Open circuit voltage	[Voc] V	1	0,997	0,990	0,966	0,938	0,914
Short circuit current	[Isc] A	1	0,900	0,800	0,500	0,300	0,200

* Ratio of Voc (Isc) at reduced intensity to Voc (Isc) at 1000 W/m2

SOLAR SIMULATOR

Class	AAA	IEC 60904-9	Power measurement uncertainty is	± 3 %
-------	-----	-------------	----------------------------------	-------

ELECTRICAL MEASURES

STC CONDITIONS		ELECTRICAL MEASURES		NMOT CONDITIONS	
Irradiance	1000 W/m2	IEC 60904-1	Irradiance	800 W/m2	IEC 61215
Cell temperature	25 °C	IEC 60904-3	Ambient temperature	20 °C	
Air Mass	1,5	ASTM G173	Air Mass	1,5	ASTM G173-03
		ASTM 1036	Wind speed	1 m/s	

MANUFACTURER



SOLAR INNOVA GREEN TECHNOLOGY, S.L.

N.I.F.: ESB-54.627.278

Paseo de los Molinos, 12

03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767

E: info@solarinnova.net

W: www.solarinnova.net




PHOTOVOLTAIC CELLS

Series PV-CELLS **Reference** SI-ESF-C-P156X156MM **Type** POLYCRYSTALLINE

STANDARD GUARANTEES

LINEAR PERFORMANCE WARRANTY

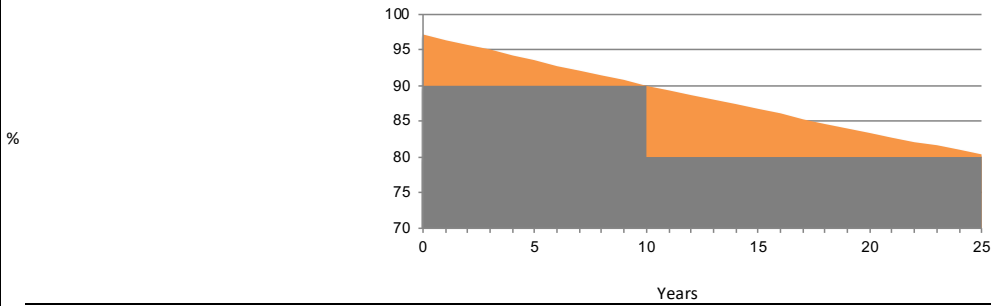

Manufacturing defects	12 years.		
Performance	90 %	of rated power after	12 years of operation,
	80 %	of rated power after	25 years of operation.
Lifespan	> 30 years.		

CERTIFICATES

ISO 9001	Quality Management Systems.
ISO 14001	Environmental Management Systems.
ISO 45001	Occupational Health and Safety Management Systems.



EXPORT INFORMATION

HS Code	85414020	TARIC code	8541409021
----------------	----------	-------------------	------------

COMMENTS

NOTICE

The specifications and technical data may be subject to possible modifications without notice.
 This data sheet are conform to the requirements of the Standard EN 50380:2018.
 Images for illustration purposes only.