



## MANUFACTURER

SOLAR INNOVA GREEN TECHNOLOGY, S.L.  
N.I.F.: ESB-54.627.278  
Paseo de los Molinos, 12  
03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767  
E: info@solarinnova.net  
W: www.solarinnova.net



## PHOTOVOLTAIC MODULES

Series

BIPV-PLINTH



Reference

SI-ESF-M-BIPV-PL-M156-66

Type

MONOCRYSTALLINE

### INTRODUCTION

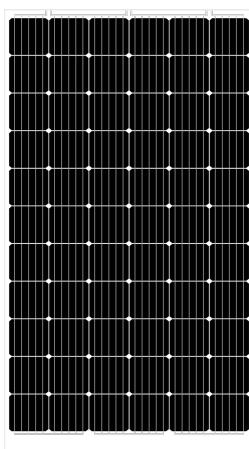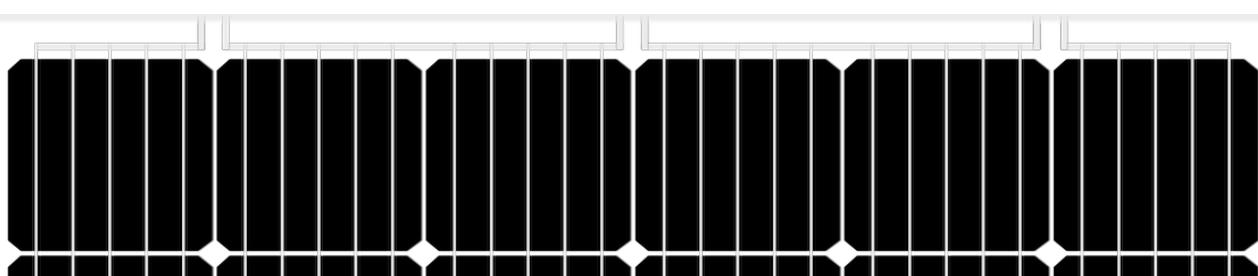

#### MATERIALS

Solar Innova uses the latest materials to manufacture photovoltaic modules.

#### USE

Our modules are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution.

#### FRONT

The front of the module contains a tempered solar glass with:

- High transmissivity.
- Low reflectivity.
- Low iron content.

#### PV CELLS

These PV modules use high-efficiency monocrystalline silicon cells (the cells are made of a single crystal of high purity silicon) to transform the energy of sunlight into electric energy.

Each cell is electrically rated to optimize the behavior of the module.

Its performance is excellent over the entire range of light spectrum, with particularly high yields in low light situations or cloudiness to direct sunlight (diffuse radiation).

#### ENCAPSULANT

The cell circuit is laminated using as encapsulant:

- PVB (Polivinil Butiral).

#### BACK

The rear of the module contains a tempered glass which provides complete protection and seals against environmental agents and electrical insulation.

#### JUNCTION BOX

The junction boxes with IP67, are made from high temperature resistant plastics and containing terminals, connection terminals and protection diodes (by-pass).

These modules are supplied with symmetric lengths of cable, with a diameter of copper section of 4 mm and an extremely low contact resistance, all designed to achieve the minimum voltage drop losses.

#### PERFORMANCE

Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.

#### QUALITY CONTROL

We have quality control divided into three elements:

- Regular inspections allow us to guarantee the quality of the raw material.
- Quality control in the process of our manufacturing procedures.
- Quality control of finished products, we conduct through inspections and tests of reliability and performance.

#### WARRANTIES

Our manufacturing plants have been prepared in accordance with:

- ISO 9001, in terms of Quality Systems and Business.
- ISO 14001, in terms of Environmental Management Systems.
- ISO 45001, in terms of Management Systems Health and Safety.

#### CERTIFICATES

Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.



MANUFACTURER					
 <b>SOLAR INNOVA GREEN TECHNOLOGY, S.L.</b> N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN		T/F: +34965075767 E: info@solarinnova.net W: www.solarinnova.net			
PHOTOVOLTAIC MODULES					
Series	BIPV-PLINTH	Reference	SI-ESF-M-BIPV-PL-M156-66	Type	MONOCRYSTALLINE
PV CELLS					
ELECTRICAL CHARACTERISTICS					
Type	Monofacial		sc-Si		
Maximum power	[Pmpp]	Wp	5,46		
Voltage at maximum power	[Vmpp]	V	0,58		
Current at maximum power	[Impp]	A	9,45		
Open circuit voltage	[Voc]	V	0,68		
Short circuit current	[Isc]	A	9,92		
Efficiency	[ηc]	%	22,20		
MECHANICAL CHARACTERISTICS			TEMPERATURE COEFFICIENTS		
Size	mm	156,75 x 156,75 ±0,25	Tk Voltage	%/K	-0,36
Thickness	μm	180 ±20	Tk Current	%/K	0,07
Front	[-]	Si3N4 anti-reflection coating	Tk Power	%/K	-0,38
Back	[+]	Aluminum back surface field (Al-BSF)			
PV MODULES					
ELECTRICAL CHARACTERISTICS					
STC CONDITIONS					
Maximum power	[Pmpp]	Wp	360		+3% (*)
Power selection	[Pmpp]	%	±5		
Voltage at maximum power	[Vmpp]	V	38,08		IEC 60904-1
Current at maximum power	[Impp]	A	9,45		IEC 60904-3
Open circuit voltage	[Voc]	V	44,75		+3% (*)
Short circuit current	[Isca]	A	9,92		+4% (*)
Maximum system voltage	[Vsyst]	V	1500 / 1000		IEC / UL
Maximum series fuse rating	[Icf]	A	15		
Efficiency	[ηm]	%	18,95		
Form Factor	[FF]	%	81,07		
STC (Standard Test Conditions):	Irradiance: 1000 W/m <sup>2</sup> + Cell Temperature: 25° C + Air Mass: 1.5				
*	(Considering LID, the power range of the certification authority)				
NMOT CONDITIONS					
Maximum power	[Pmpp]	Wp	265		IEC 61215
Voltage at maximum power	[Vmpp]	V	34,67		
Current at maximum power	[Impp]	A	7,68		
Open circuit voltage	[Voc]	V	40,90		
Short circuit current	[Isca]	A	8,05		
NMOT (Nominal Module Operating Temperature):	Irradiance: 800 W/m <sup>2</sup> + Ambient Temperature: 20° C + Air Mass: 1.5 + Wind Speed: 1 m/s				
MECHANICAL CHARACTERISTICS					
PANEL	WIDTH (X)	HIGH (Y)	DIAGONAL	AREA	POWER/AREA
Size - Glass-1	1000	x	1900 mm	1,90 m <sup>2</sup>	190 Wp/m <sup>2</sup>
Size - Glass-2	1000	x	1900 mm	1,90 m <sup>2</sup>	
CELLS					
Size	156,75	x	156,75 mm	210 mm	0,02 m <sup>2</sup>
Distance - Top			68 mm		
Distance - between Cells	4	x	4 mm		
Distance - Left	20 mm				
Distance - Right	20 mm				
Distance - Bottom			68 mm		
Quantity	6	x	11 =	66 units	1,62 m <sup>2</sup>
COMPONENTS					
MATERIAL	QUANTITY	THICKNESS (Z)	DESCRIPTION	DENSITY	TOTAL WEIGHT
Glass-1	1 units	6 mm	Tempered	15,19 kg/m <sup>2</sup>	28,85 kg
Sheet Encapsulant	1 units	0,76 mm	PVB	0,81 kg/m <sup>2</sup>	1,54 kg
Busbars	5 units	1 mm	CuSn6	0,10 kg/m <sup>2</sup>	0,16 kg
PV Cells	66 units	0,21 mm	sc-Si	0,20 kg/m <sup>2</sup>	0,32 kg
Sheet Encapsulant	1 units	0,76 mm	PVB	0,81 kg/m <sup>2</sup>	1,54 kg
Glass-2	1 units	6 mm	Tempered	15,19 kg/m <sup>2</sup>	28,85 kg
Junction Box	1 units	10 mm	PVC-IP68	0,10 kg/m <sup>2</sup>	0,10 kg
Diodes (By-pass)	5 units			0,01 kg/m <sup>2</sup>	0,02 kg
Cables (+/-)	2 units	4 mm <sup>2</sup>	900 mm	0,10 kg/m <sup>2</sup>	0,20 kg
Connectors	2 units	MC4-T4 type	PVC-IP67	0,05 kg/m <sup>2</sup>	0,10 kg
<b>TOTAL</b>		13,73 mm		32,55 kg/m <sup>2</sup>	61,69 kg
THERMAL CHARACTERISTICS					
TEMPERATURE COEFFICIENTS			MONOCRYSTALLINE		
Temperature coefficient of short circuit current	α	[Isca]		0,0814	%/° C
Temperature coefficient of open circuit voltage	β	[Voc]		-0,3910	%/° C
Temperature coefficient of maximum power	γ	[Pmpp]		-0,5141	%/° C
Temperature coefficient of current at maximum power		[Impp]		0,1000	%/° C
Temperature coefficient of voltage at maximum power		[Vmpp]		-0,3800	%/° C
Nominal Module Operating Temperature		[NMOT]		+ 47 ± 2	° C
TOLERANCES					
Working temperature	- 40 / + 85 °C		Glass dimension	< ± 2,5 mm	EN 12543-5
Dielectric isolation voltage	3000 V		Glass symmetry tolerance	< ± 3 mm	EN 12543-5
Relative humidity	0 / 100 %		Cell single string distolerance	< ± 1 mm	EN 12543-6
Wind resistance	2400 Pa	245 kg/m <sup>2</sup>			IEC 61215
Snow resistance	21600 Pa	2203 kg/m <sup>2</sup>	Maximum hail resistance	Ø 35	97 m/s
Conductivity at ground	≤ 0,1 Ω		Resistance	≥ 100 Ω	
CLASSIFICATIONS					
Application class	A Class	IEC 61730	Pollution	1 Degree	IEC 61730
Electrical protection class	II Class	IEC 61140	Material	I Group	IEC 61730
Fire safety class	A Class	ANSI/UL 790 IEC 61730	Safety	1,5 Factors	IEC 61730

MANUFACTURER									
<b>SOLAR INNOVA</b>		SOLAR INNOVA GREEN TECHNOLOGY, S.L.							
N.I.F.: ESB-54.627.278		T/F: +34965075767							
Paseo de los Molinos, 12		E: info@solarinnova.net							
03660 - NOVELDA (Alicante) SPAIN									
PHOTOVOLTAIC MODULES									
Series	BIPV-PLINTH	Reference	SI-ESF-M-BIPV-PL-M156-66	Type	MONOCRYSTALLINE				
DRAWING									
JUNCTION BOX									
Position	[Front] - [Rear]	■ Border	- [Axis (X)] ■ [Axis (Y)]	-					
PANEL									
FRONT		REAR		SECTION					
		WIDTH (X) 1000 mm		THICKNESS (Z) 13,73 mm					
PERFORMANCE									
CELLS									
TEMPERATURE			IRRADIANCE						
Temperature depending on Isc, Voc and Pmax			Irradiance depending on Isc, Voc and Pmax (cell temperature: 25°C)						
Cell temperature (°C)			Irradiance (W/m²)						
--- Pmax --- Voc --- Isc			--- Voc --- Isc --- Pmax						
PANELS			IV-IRRADIANCE						
TEMPERATURE									
Electrical performance (cell temperature: 25°C)									
Current (A)			Voltage (V)						
--- I-V 1000 W/m² --- P-I 1000 W/m²			I-V (-25°C) I-V (0°C) I-V (+25°C) I-V (+50°C) I-V (+75°C)						
--- I-V 800 W/m² --- P-I 800 W/m²									
--- I-V 600 W/m² --- P-I 600 W/m²									
--- I-V 400 W/m² --- P-I 400 W/m²									
--- I-V 200 W/m² --- P-I 200 W/m²									
SOLAR SIMULATOR									
Class	AAA	IEC 60904-9	Power measurement uncertainty is ± 3 %						
ELECTRICAL MEASURES									
STC CONDITIONS			NMOT CONDITIONS						
Irradiance	1000 W/m²	IEC 60904-1	Irradiance	800 W/m²	IEC 61215				
Cell temperature	25 °C	IEC 60904-3	Ambient temperature	20 °C					
Air Mass	1,5	ASTM G173	Air Mass	1,5	ASTM G173-03				
		ASTM 1036	Wind speed	1 m/s					
Page 3/4									

MANUFACTURER					
<b>SOLAR INNOVA</b> INNOVA	N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN	T/F: +34965075767 E: info@solarinnova.net W: www.solarinnova.net			
PHOTOVOLTAIC MODULES					
Series	BIPV-PLINTH	Reference	SI-ESF-M-BIPV-PL-M156-66	Type	MONOCRYSTALLINE
STANDARD GUARANTEES					
LINEAR PERFORMANCE WARRANTY					
%	100	95	90	85	80
	0	5	10	15	20
	Years				
Manufacturing defects	12 years.				
Performance	90 % of rated power after 12 years of operation,				
	80 % of rated power after 25 years of operation.				
Lifespan	> 30 years.				
ENVIRONMENTAL INFORMATION					
Solar Hours Peak	6 day		kWh	Coal	Petrol/Gas Combined
Irradiation rate	1000 W/ m <sup>2</sup>			1	0,961 0,828 0,372 kg/CO <sub>2</sub>
Energy generated	2,16 kWh/ day	Avoid	day	2,08	1,79 0,80 kg/CO <sub>2</sub>
	65 kWh/ month	CO <sub>2</sub>	month	62,28	53,66 24,11 kg/CO <sub>2</sub>
	789 kWh/ year	emissions	year	757,78	652,90 293,33 kg/CO <sub>2</sub>
CERTIFICATES					
ISO 9001	Quality Management Systems.				
ISO 14001	Environmental Management Systems.				
ISO 45001	Occupational Health and Safety Management Systems.				
CE	Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits.				
EN 50583-1	Photovoltaics in buildings - Part 1: BIPV modules.				
IEC/EN 61215	Crystalline silicon terrestrial photovoltaic (PV) modules. Design qualification and type approval.				
IEC/EN 61730-1	Photovoltaic (PV) module safety qualification - Part 1: Requirements for construction.				
IEC/EN 61730-2	Photovoltaic (PV) module safety qualification - Part 2: Requirements for testing.				
IEC/EN 61701	Salt mist corrosion testing of photovoltaic (PV) modules.				
IEC/EN 62716	Photovoltaic (PV) modules - Ammonia corrosion testing.				
UNE-EN IEC 62804-1	Photovoltaic (PV) Modules - Test Methods for the detection of potential-induced degradation. Part 1: Crystalline silicone.				
IEC/EN 62790	Junction boxes for photovoltaic modules - Safety requirements and tests.				
IEC/EN 62852	Connectors for DC-application in photovoltaic systems - Safety requirements and test.				
UL 1703	Standard for Flat-Plate Photovoltaic Modules and Panels.				
PACKING					
CONTAINER 20'		CONTAINER 40'HQ			
PANELS X PALLET	PALLETS	TOTAL	PANELS X PALLET	PALLETS	TOTAL
-	-	-	26	22	572
IEC 62759-1	Photovoltaic (PV) modules - Transportation testing - Part 1: Transportation and shipping of module package units.				
EXPORT INFORMATION					
HS Code	85414020	TARI <sub>C</sub> code	8541409021		
REGISTER OF ELECTRICAL AND ELECTRONIC EQUIPMENT PRODUCERS					
WEEE	7378	Entity	ECOASIMELEC		
DESCRIPTION					
Silicon cell photovoltaic solar module sc-Si from the manufacturer SOLAR INNOVA, BIPV-Plinths series, maximum power (W <sub>p</sub> ) 360 W, voltage at maximum power (V <sub>mp</sub> ) 38,08 V, current at maximum power (I <sub>mp</sub> ) 9,45 A, open-circuit voltage (V <sub>oc</sub> ) 44,75 V, short-circuit current (I <sub>sc</sub> ) 9,92 A, efficiency 18,95 %, composed of 66 cells, front layer tempered glass thick 6 mm, encapsulant layers of cells of PVB, back layer of tempered glass thick 6 mm, junction box (diodes, cables 4 mm <sup>2</sup> , 900 mm and connectors MC4-T4), working temperature - 40 / + 85 °C, dimensions 1000 x 1900 x 13,73 mm, maximum wind load 2400 Pa, maximum snow load 21600 Pa, weight 61,69 kg.					
COMMENTS					
<hr/> <hr/>					
NOTICE					
The specifications and technical data may be subject to possible modifications without notice.					
This data sheet are conform to the requirements of the Standard EN 50380.					
Page 4/4					