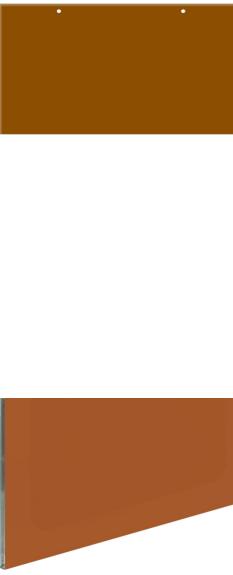

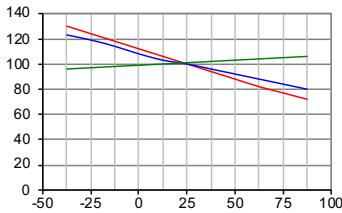
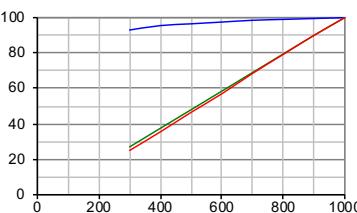
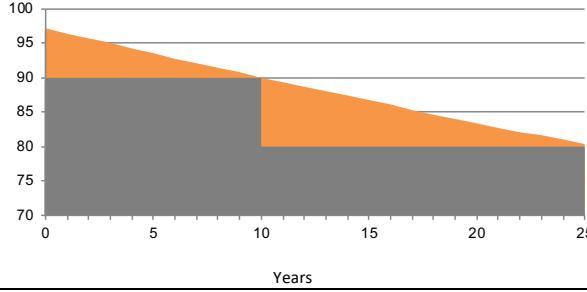


MANUFACTURER					
	<b>SOLAR INNOVA GREEN TECHNOLOGY, S.L.</b>				
	N.I.F.: ESB-54.627.278	Paseo de los Molinos, 12	T/F: +34965075767	E: info@solarinnova.net	W: www.solarinnova.net
	03660 - NOVELDA (Alicante) SPAIN				
<b>PHOTOVOLTAIC MODULES</b>					
<b>Series</b>	BIPV-TILES	<b>Reference</b>	BIPV-TL-M158-8H-CL-TO-RAL-8023	<b>Type</b>	MONOCRYSTALLINE
<b>INTRODUCTION</b>					
					
	<b>MATERIALS</b>	Solar Innova uses the latest materials to manufacture photovoltaic modules.			
	<b>USE</b>	Our modules are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution.			
	<b>FRONT</b>	The front of the module contains a tempered solar glass with: <ul style="list-style-type: none"> <li>□ High transmissivity.</li> <li>□ Low reflectivity.</li> <li>□ Low iron content.</li> </ul>			
	<b>PV CELLS</b>	These PV modules use high-efficiency monocrystalline silicon cells (the cells are made of a single crystal of high purity silicon) to transform the energy of sunlight into electric energy.  Each cell is electrically rated to optimize the behavior of the module.			
		Its performance is excellent over the entire range of light spectrum, with particularly high yields in low light situations or cloudiness to direct sunlight (diffuse radiation).			
	<b>ENCAPSULANT</b>	The cell circuit is laminated using as encapsulant: <ul style="list-style-type: none"> <li>□ PVB (Polivinil Butiral).</li> </ul>			
<b>BACK</b>	The rear of the module contains a tempered glass which provides complete protection and seals against environmental agents and electrical insulation.				
<b>JUNCTION BOX</b>	The junction boxes with IP67, are made from high temperature resistant plastics and containing terminals, connection terminals and protection diodes (by-pass).  These modules are supplied with symmetric lengths of cable, with a diameter of copper section of 4 mm and an extremely low contact resistance, all designed to achieve the minimum voltage drop losses.				
<b>PERFORMANCE</b>	Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.				
<b>QUALITY CONTROL</b>	We have quality control divided into three elements: <ul style="list-style-type: none"> <li>□ Regular inspections allow us to guarantee the quality of the raw material.</li> <li>□ Quality control in the process of our manufacturing procedures.</li> <li>□ Quality control of finished products, we conduct through inspections and tests of reliability and performance.</li> </ul>				
<b>WARRANTIES</b>	Our manufacturing plants have been prepared in accordance with: <ul style="list-style-type: none"> <li>□ ISO 9001, in terms of Quality Systems and Business.</li> <li>□ ISO 14001, in terms of Environmental Management Systems.</li> <li>□ ISO 45001, in terms of Management Systems Health and Safety.</li> </ul>				
<b>CERTIFICATES</b>	Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.				
					
Page <b>1/4</b>					

MANUFACTURER						
	SOLAR INNOVA GREEN TECHNOLOGY, S.L.	N.I.F.: ESB-54.627.278	T/F: +34965075767	E: info@solarinnova.net	W: www.solarinnova.net	
	Paseo de los Molinos, 12					
	03660 - NOVELDA (Alicante) SPAIN					
PHOTOVOLTAIC MODULES						
Series	BIPV-TILES	Reference	BIPV-TL-M158-8H-CL-TO-RAL-8023	Type	MONOCRYSTALLINE	
		PV CELLS				
Type	Monofacial		sc-Si			
MECHANICAL CHARACTERISTICS				TEMPERATURE COEFFICIENTS		
Size	mm	158,75 x 158,75 ±0,25		Tk Voltage	%/K	-0,36
Thickness	µm	180 ±20		Tk Current	%/K	0,06
Front	[ - ]	Si3N4 anti-reflection coating		Tk Power	%/K	-0,36
Back	[ + ]	Aluminum back surface field (Al-BSF)				
PV MODULES						
ELECTRICAL CHARACTERISTICS						
STC CONDITIONS						
Maximum power	[Pmpp]	Wp		34		±3% (*)
Power selection	[Pmpp]	%		±3		
Voltage at maximum power	[Vmpp]	V		4,64		IEC 60904-1
Current at maximum power	[Impp]	A		7,39		IEC 60904-3
Open circuit voltage	[Voc]	V		5,47		±3% (*)
Short circuit current	[Isc]	A		7,83		±4% (*)
Maximum system voltage	[Vsyst]	V		1000		IEC / UL
Maximum series fuse rating	[Icf]	A		15		
Efficiency	[ηm]	%		14,65		
Form Factor	[FF]	%		80,17		
STC (Standard Test Conditions):	Irradiance: 1000 W/m <sup>2</sup> + Cell Temperature: 25° C + Air Mass: 1,5					
	* (Considering LID, the power range of the certification authority)					
NMOT CONDITIONS						
Maximum power	[Pmpp]	Wp		25		IEC 61215
Voltage at maximum power	[Vmpp]	V		4,23		
Current at maximum power	[Impp]	A		6,00		
Open circuit voltage	[Voc]	V		5,00		
Short circuit current	[Isc]	A		6,35		
NMOT (Nominal Module Operating Temperature):	Irradiance: 800 W/m <sup>2</sup> + Ambient Temperature: 20° C + Air Mass: 1,5 + Wind Speed: 1 m/s					
MECHANICAL CHARACTERISTICS						
PANEL	WIDTH (X)	HIGH (Y)	DIAGONAL	AREA	POWER/AREA	
Size - Glass-2	710	x	410 mm		0,23 m <sup>2</sup>	146 Wp/m <sup>2</sup>
Size - Glass-2	710	x	410 mm		0,23 m <sup>2</sup>	
CELLS						
Size	158,75	x	158,75 mm	223 mm	0,03 m <sup>2</sup>	
Distance - Top			73 mm			
Distance - between Cells	4	x	4 mm			
Distance - Left	32	mm				
Distance - Right	32	mm				
Distance - Bottom			17 mm			
Quantity	4	x	2	= 8 units	0,20 m <sup>2</sup>	
COMPONENTS						
MATERIAL	QUANTITY	THICKNESS (Z)	DESCRIPTION	DENSITY	TOTAL WEIGHT	THERMAL RESISTANCE
Frame	1 units	10 mm	Al 6065-T5	0,35 kg/m <sup>2</sup>	0,08 kg	
Glass-1	1 units	4 mm	FTG-UClear	10,12 kg/m <sup>2</sup>	2,37 kg	0,1738 m <sup>2</sup> K/W
Sheet Encapsulant	1 units	0,38 mm	PVB-RAL 8023	0,40 kg/m <sup>2</sup>	0,09 kg	0,0032 m <sup>2</sup> K/W
Busbars	5 units	1 mm	CuSn6	0,10 kg/m <sup>2</sup>	0,02 kg	
PV Cells	8 units	0,21 mm	sc-Si	0,20 kg/m <sup>2</sup>	0,04 kg	
Sheet Encapsulant	1 units	0,38 mm	PVB	0,40 kg/m <sup>2</sup>	0,09 kg	0,0032 m <sup>2</sup> K/W
Backsheet	1 units	0,5 mm	TPT-RAL 9005	0,47 kg/m <sup>2</sup>	0,11 kg	0,0032 m <sup>2</sup> K/W
Glass-2	1 units	4 mm	FTG	10,12 kg/m <sup>2</sup>	2,37 kg	0,1738 m <sup>2</sup> K/W
Junction Box	1 units	10 mm	PVC-IP68	0,10 kg/m <sup>2</sup>	0,10 kg	
Diodes (By-pass)	1 units			0,01 kg/m <sup>2</sup>	0,02 kg	
Cables (+/-)	2 units	4 mm <sup>2</sup>	200 mm	0,10 kg/m <sup>2</sup>	0,20 kg	
Connectors	2 units		MC4-T4 type	PVC-IP67	0,05 kg/m <sup>2</sup>	0,10 kg
Holes	2 units	5 mm	Ø			
TOTAL		9,47 mm		22,44 kg/m <sup>2</sup>	5,61 kg	0,36 m <sup>2</sup> K/W
THERMAL CHARACTERISTICS						
TEMPERATURE COEFFICIENTS				MONOCRYSTALLINE		
Temperature coefficient of short circuit current	α	[Isc]		0,0600		%/° C
Temperature coefficient of open circuit voltage	β	[Voc]		-0,3600		%/° C
Temperature coefficient of maximum power	γ	[Pmpp]		-0,3600		%/° C
Temperature coefficient of current at maximum power		[Impp]		0,1000		%/° C
Temperature coefficient of voltage at maximum power		[Vmpp]		-0,3800		%/° C
Nominal Module Operating Temperature		[NMOT]		+ 47 ± 2		° C
THERMAL TRANSMITTANCE (U)						
Ug-Value	2,80 W/m <sup>2</sup> K	EN 673	G-Value	0,36 %		EN 410
UV TRANSMITTANCE						
UV-Value	0,00 %	300-380 nm	EN 410	R-Value	32(-1:-3)	EN 12758
VISIBLE LIGHT TRANSMISSION (LT)						
LT-Value	0,00 %	380-780 nm	EN 410	Opacity	100,00 %	CIE D65 ISO 9050
EXTERIOR REFLECTION (LRe)						
LRe-Value	8,00 %	EN 410	LRI-Value	15,00 %		EN 410
TOLERANCES						
Working temperature	- 40 / + 85 °C		Glass dimension	< ± 2,5 mm		EN 12543-5
Dielectric isolation voltage	3000 V		Glass symmetrytolerance	< ± 3 mm		EN 12543-5
Relative humidity	0 / 100 %		Cell single string distolerance	< ± 1 mm		EN 12543-6
Wind resistance	14205 Pa	1449 kg/m <sup>2</sup>				IEC 61215
Snow resistance	14205 Pa	1449 kg/m <sup>2</sup>	Maximum hail resistance	Ø 35	97 m/s	IEC 61215
Conductivity at ground	≤ 0,1 Ω		Resistance	≥ 100 Ω		
CLASSIFICATIONS						
Application class	A Class	IEC 61730	Pollution	1 Degree		IEC 61730
Electrical protection class	II Class	IEC 61140 IEC 61730	Material	I Group		IEC 61730
Fire safety class	A Class	ANSI/UL 790 IEC 61730	Safety	1,5 Factors		IEC 61730
LAMINATED GLASS (EN 14449)						
Impact resistance	1B1 Class	EN 12600	High temperature	OK		EN 12543-4
Manual attack	P2A Class	EN 356	Humidity	OK		EN 12543-4

MANUFACTURER									
 <b>SOLAR INNOVA GREEN TECHNOLOGY, S.L.</b> N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN		T/F: +34965075767 E: info@solarinnova.net W: www.solarinnova.net							
PHOTOVOLTAIC MODULES									
Series	BIPV-TILES	Reference	BIPV-TL-M158-8H-CL-TO-RAL-8023	Type	MONOCRYSTALLINE				
DRAWING									
JUNCTION BOX									
Position	Front -	Rear -	Edge ■ Axis (X) ■ Axis (Y) -	PANEL					
FRONT		REAR		SECTION					
									
WIDTH (X) 710 mm				THICKNESS (Z) 9,47 mm					
PERFORMANCE									
CELLS									
TEMPERATURE			IRRADIANCE						
Temperature depending on Isc, Vox and Pmax			Irradiance depending on Isc, Voc and Pmax (cell temperature: 25° C)						
									
Cell temperature (° C) --- Pmax --- Voc --- Isc			Irradiance (W/m²) --- Voc --- Isc --- Pmax						
PANELS									
TEMPERATURE			IV-IRRADIANCE						
Electrical performance (cell temperature: 25° C)									
Current (A)			Power (W)						
VOLTAGE (V)									
--- I-V 1000 W/m² --- I-V 800 W/m² --- I-V 600 W/m² --- I-V 400 W/m² --- I-V 200 W/m²		--- P-I 1000 W/m² --- P-I 800 W/m² --- P-I 600 W/m² --- P-I 400 W/m² --- P-I 200 W/m²		I-V (-25°C) I-V (0°C) I-V (+25°C) I-V (+50°C) I-V (+75°C)					
SOLAR SIMULATOR									
Class	AAA	IEC 60904-9	Power measurement uncertainty is ± 3 %						
ELECTRICAL MEASURES									
STC CONDITIONS			NMOT CONDITIONS						
Irradiance	1000 W/m²	IEC 60904-1	Irradiance	800 W/m²	IEC 61215				
Cell temperature	25 °C	IEC 60904-3	Ambient temperature	20 °C					
Air Mass	1,5	ASTM G173	Air Mass	1,5	ASTM G173-03				
		ASTM 1036	Wind speed	1 m/s					
Page 3/4									

MANUFACTURER					
 <b>SOLAR INNOVA GREEN TECHNOLOGY, S.L.</b> N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN		T/F: +34965075767 E: info@solarinnova.net W: www.solarinnova.net			
PHOTOVOLTAIC MODULES					
Series	BIPV-TILES	Reference	BIPV-TL-M158-8H-CL-TO-RAL-8023	Type	MONOCRYSTALLINE
STANDARD GUARANTEES					
LINEAR PERFORMANCE WARRANTY					
					
Manufacturing defects	12 years.				
Performance	90 % of rated power after 12 years of operation,				
	80 % of rated power after 25 years of operation.				
Lifespan	> 30 years.				
ENVIRONMENTAL INFORMATION					
Solar Hours Peak	6 day		kWh	Coal	Petrol/Gas Combined
Irradiation rate	1000 W/ m2		1	0,961	0,828
Energy generated	0,21 kWh/ day	Avoid	day	0,20	0,17
	6 kWh/ month	CO2	month	5,94	5,12
	75 kWh/ year	emissions	year	72,23	62,23
CERTIFICATES					
ISO 9001	Quality Management Systems.				
ISO 14001	Environmental Management Systems.				
ISO 18001	Occupational Health and Safety Management Systems.				
CE	Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits.				
IEC/EN 61215	Crystalline silicon terrestrial photovoltaic (PV) modules. Design qualification and type approval.				
IEC/EN 61730-1	Photovoltaic (PV) module safety qualification - Part 1: Requirements for construction.				
IEC/EN 61730-2	Photovoltaic (PV) module safety qualification - Part 2: Requirements for testing.				
IEC 63092-1	Photovoltaics in buildings - Part 1: Requirements for building-integrated photovoltaic modules.				
UL 1703	Standard for Flat-Plate Photovoltaic Modules and Panels.				
EN 13501	Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests.				
EN 14449	Glass in building - Laminated glass and laminated safety glass - Evaluation of conformity/Product standard.				
EN 12543	Glass in building - Laminated glass and laminated safety glass.				
EN 12600	Glass in building - Pendulum test - Impact test method and classification for flat glass.				
EN 50583	Photovoltaics in buildings - Part 1: BIPV modules.				
					
PACKING					
CONTAINER 20'		TOTAL	CONTAINER 40'HQ		TOTAL
PANELS X PALLET	PALLETS		PANELS X PALLET	PALLETS	
120	30	3600	120	56	6720
IEC 62759-1					
Photovoltaic (PV) modules - Transportation testing - Part 1: Transportation and shipping of module package units.					
EXPORT INFORMATION					
HS Code	85.41.43.00	TARI code	85.41.43.00		
REGISTER OF ELECTRICAL AND ELECTRONIC EQUIPMENT PRODUCERS					
WEEE	7378	Entity	ECOASIMELEC		
DESCRIPTION					
Silicon cell photovoltaic solar module sc-Si, BIPV-Tiles series, for architectural integration, from the manufacturer SOLAR INNOVA, maximum power (Wp) 34 W, voltage at maximum power (Vm) 4,64 V, current at maximum power (Im) 7,39 A, open-circuit voltage (Voc) 5,47 V, short-circuit current (Isc) 7,83 A, efficiency 14,65 %, composed of 8 cells, front layer tempered glass thick 4 mm, encapsulant layers of cells of PVB-RAL 8023, back layer of tempered glass thick 4 mm, anodized aluminum frame Al 6065-T5, junction box (diodes, cables 4 mm2, 200 mm and connectors MC4-T4), working temperature - 40 / + 85 °C, dimensions 710 x 410 x 9,47 mm, maximum wind load 14205 Pa, maximum snow load 14205 Pa, weight 5,61 kg.					
COMMENTS					
<hr/> <hr/>					
NOTICE					
The specifications and technical data may be subject to possible modifications without notice.					
This data sheet are conform to the requirements of the Standard EN 50380.					
Images for illustration purposes only.					
Page <b>4/4</b>					