



MANUFACTURER

SOLAR INNOVA GREEN TECHNOLOGY, S.L.
N.I.F.: ESB-54.627.278
Paseo de los Molinos, 12
03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767
E: info@solarinnova.net
W: www.solarinnova.net



PHOTOVOLTAIC MODULES

Series

STANDARD



Reference

SI-ESF-M-ST-M125-88

Type

MONOCRYSTALLINE

INTRODUCTION

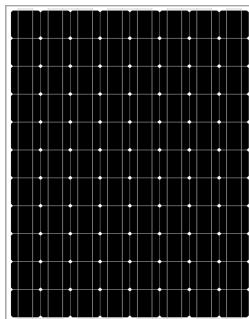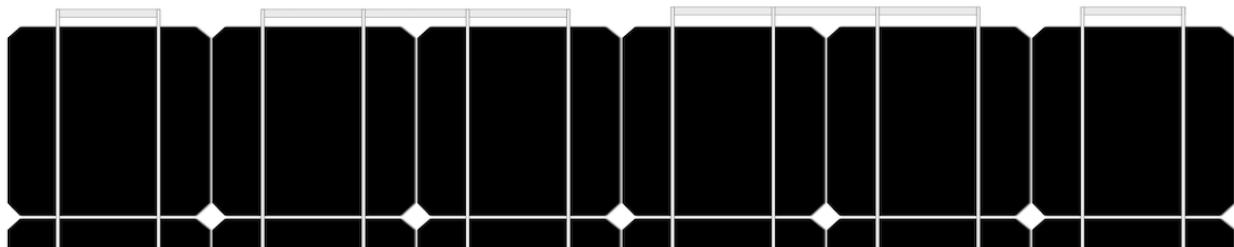

MATERIALS

Solar Innova uses the latest materials to manufacture photovoltaic modules.

USE

Our modules are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution.

FRONT

The front of the module contains a tempered solar glass with:
 High transmissivity.
 Low reflectivity.
 Low iron content.

PV CELLS

These PV modules use high-efficiency monocrystalline silicon cells (the cells are made of a single crystal of high purity silicon) to transform the energy of sunlight into electric energy.

Each cell is electrically rated to optimize the behavior of the module.

Its performance is excellent over the entire range of light spectrum, with particularly high yields in low light situations or cloudiness to direct sunlight (diffuse radiation).

ENCAPSULANT

The cell circuit is laminated using as encapsulant:
 EVA (Ethylene-Vinyl Acetate).

BACK

The rear of the module contains a plastic polymer (Tedral) which provides complete protection and seals against environmental agents and electrical insulation.

FRAME

The compact, anodized aluminum frame provides an optimal relationship-weight moment of inertia, to obtain greater rigidity and resistance to twisting and bending. It has several holes to attach the module to the support structure and ground if necessary.

JUNCTION BOX

The junction boxes with IP67, are made from high temperature resistant plastics and containing terminals, connection terminals and protection diodes (by-pass).

These modules are supplied with symmetric lengths of cable, with a diameter of copper section of 4 mm and an extremely low contact resistance, all designed to achieve the minimum voltage drop losses.

PERFORMANCE

Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.

QUALITY CONTROL

We have quality control divided into three elements:

- Regular inspections allow us to guarantee the quality of the raw material.
- Quality control in the process of our manufacturing procedures.
- Quality control of finished products, we conduct through inspections and tests of reliability and performance.


WARRANTIES

Our manufacturing plants have been prepared in accordance with:

- ISO 9001, in terms of Quality Systems and Business.
- ISO 14001, in terms of Environmental Management Systems.
- ISO 45001, in terms of Management Systems Health and Safety.

CERTIFICATES

Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.

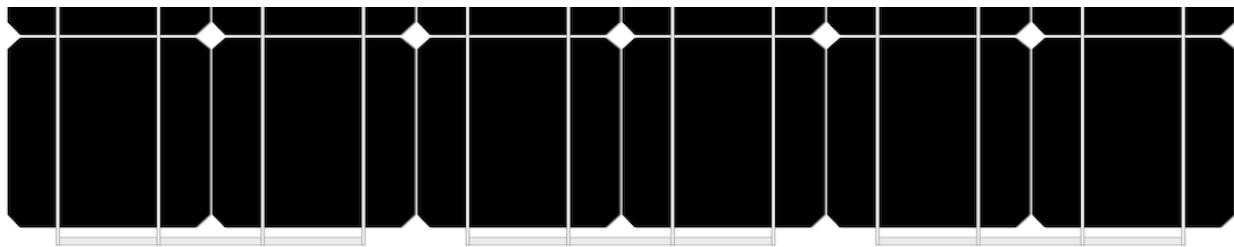

MANUFACTURER										
SOLAR INNOVA		SOLAR INNOVA GREEN TECHNOLOGY, S.L.								
N.I.F.: ESB-54.627.278		T/F: +34965075767								
Paseo de los Molinos, 12		E: info@solarinnova.net								
03660 - NOVELDA (Alicante) SPAIN										
PHOTOVOLTAIC MODULES										
Series	STANDARD	Reference	SI-ESF-M-ST-M125-88	Type	MONOCRYSTALLINE					
DRAWING										
Position	[Front] - [Rear]	■ Border	- [Axis (X)] ■ [Axis (Y)] -							
JUNCTION BOX										
FRONT										
REAR										
mm										
1455 mm										
WIDTH (X) 1069 mm										
PERFORMANCE										
CELLS										
TEMPERATURE			IRRADIANCE							
Temperature depending on Isc, Voc and Pmax			Irradiance depending on Isc, Voc and Pmax (cell temperature: 25°C)							
Cell temperature (°C)			Irradiance (W/m²)							
--- Pmax --- Voc --- Isc			--- Voc --- Isc --- Pmax							
PANELS										
IV-IRRADIANCE										
TEMPERATURE			IV-IRRADIANCE							
Electrical performance (cell temperature: 25°C)										
Voltage (V)			Voltage (V)							
---- I-V 1000 W/m²			I-V (-25°C) I-V (0°C) I-V (25°C) I-V (50°C) I-V (75°C)							
---- I-V 800 W/m²										
---- I-V 600 W/m²										
---- I-V 400 W/m²										
---- I-V 200 W/m²										
SOLAR SIMULATOR										
Class	AAA	IEC 60904-9	Power measurement uncertainty is ± 3 %							
ELECTRICAL MEASURES										
STC CONDITIONS			NMOT CONDITIONS							
Irradiance	1000 W/m²	IEC 60904-1	Irradiance	800 W/m²	IEC 61215					
Cell temperature	25 °C	IEC 60904-3	Ambient temperature	20 °C						
Air Mass	1,5	ASTM G173	Air Mass	1,5	ASTM G173-03					
		ASTM 1036	Wind speed	1 m/s						

MANUFACTURER						
SOLAR INNOVA INNOVA	N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN	T/F: +34965075767 E: info@solarinnova.net W: www.solarinnova.net				
PHOTOVOLTAIC MODULES						
Series	STANDARD	Reference	SI-ESF-M-ST-M125-88	Type	MONOCRYSTALLINE	
STANDARD GUARANTEES						
LINEAR PERFORMANCE WARRANTY						
%	100	95	90	85	80	
	0	5	10	15	20	25
	Years					
Manufacturing defects	12 years.					
Performance	90 % of rated power after 12 years of operation,					
	80 % of rated power after 25 years of operation.					
Lifespan	> 30 years.					
ENVIRONMENTAL INFORMATION						
Solar Hours Peak	6 day		kWh	Coal	Petrol/Gas Combined	
Irradiation rate	1000 W/ m ²		1	0,961	0,828	0,372 kg/CO ₂
Energy generated	1,53 kWh/ day	Avoid	day	1,47	1,27	0,57 kg/CO ₂
	46 kWh/ month	CO ₂	month	44,11	38,01	17,08 kg/CO ₂
	559 kWh/ year	emissions	year	536,72	462,44	207,76 kg/CO ₂
CERTIFICATES						
ISO 9001	Quality management systems.					
ISO 14001	Environmental management systems.					
ISO 45001	Occupational health and safety management systems.					
CE	Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits.					
IEC/EN 61215	Crystalline silicon terrestrial photovoltaic (PV) modules. Design qualification and type approval.					
IEC/EN 61730-1	Photovoltaic (PV) module safety qualification - Part 1: Requirements for construction.					
IEC/EN 61730-2	Photovoltaic (PV) module safety qualification - Part 2: Requirements for testing.					
IEC/EN 61701	Salt mist corrosion testing of photovoltaic (PV) modules.					
IEC/EN 62716	Photovoltaic (PV) modules - Ammonia corrosion testing.					
UNE-EN IEC 62804-1	Photovoltaic (PV) Modules - Test Methods for the detection of potential-induced degradation. Part 1: Crystalline silicone.					
IEC/EN 62790	Junction boxes for photovoltaic modules - Safety requirements and tests.					
IEC/EN 62852	Connectors for DC-application in photovoltaic systems - Safety requirements and test.					
UL 1703	Standard for Flat-Plate Photovoltaic Modules and Panels.					
PACKING						
PANELS X PALLET	CONTAINER 20' PALLETS	TOTAL	PANELS X PALLET	CONTAINER 40'HQ PALLETS	TOTAL	
-	-	-	26	22	572	
IEC 62759-1	Photovoltaic (PV) modules - Transportation testing - Part 1: Transportation and shipping of module package units.					
EXPORT INFORMATION						
HS Code	85414020	TARI ^C code	8541409021			
REGISTER OF ELECTRICAL AND ELECTRONIC EQUIPMENT PRODUCERS						
WEEE	7378	Entity	ECOASIMELEC			
DESCRIPTION						
Silicon cell photovoltaic solar module sc-Si from the manufacturer SOLAR INNOVA, Standard series, maximum power (W _p) 255-270 W, voltage at maximum power (V _{mp}) 46,20-46,64 V, current at maximum power (I _{mp}) 5,52-5,79 A, open-circuit voltage (V _{oc}) 56,18-56,40 V, short-circuit current (I _{sc}) 5,78-6,13 A, efficiency 16,40-17,36 %, composed of 88 cells, front layer tempered glass thick 3,2 mm, encapsulant layers of cells of EVA, back layer of TPT, anodized aluminum frame Al 6065-T5, junction box (diodes, cables 4 mm ² , 900 mm and connectors MC4-T4), working temperature - 40 / + 85 °C, dimensions 1069 x 1455 x 40 mm, maximum wind load 2400 Pa, maximum snow load 5400 Pa, weight 17,59 kg.						
COMMENTS						
<hr/> <hr/>						
NOTICE						
The specifications and technical data may be subject to possible modifications without notice.						
This data sheet are conform to the requirements of the Standard EN 50380.						
Page 4/4						