




## PHOTOVOLTAIC SOLAR ENERGY MOUNTING - CANOPY - SI-ESF-S-CANOPY

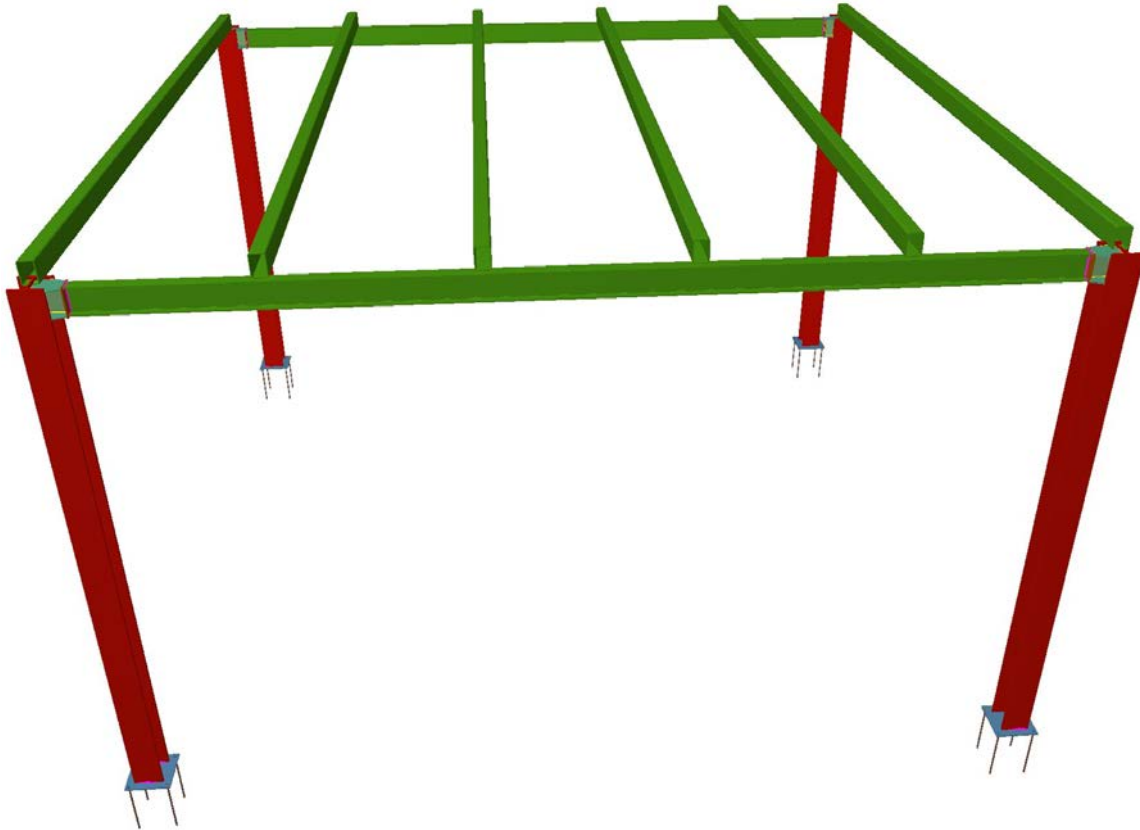

Photovoltaic technology (PV) has a great potential for integration in public spaces and is especially suitable for urban furniture.

Solar Innova has developed a Photovoltaic Canopy solution that consists of a structure where a photovoltaic solar installation guarantees on-site power generation.

The installation of photovoltaic solar panels on this canopy allows multiple functions such as creating shade, protection against rain, hail and snow, as well as significant energy savings.

This design is based on a canopy with a photovoltaic integration on the roof, inclined 2° with respect to the horizontal, with a variable orientation with respect to the azimuth, depending on the specific needs of each plot.

A roof with minimal slope has been designed, capable of evacuating rainwater without problems and which is also polyvalent in any orientation.

The photovoltaic canopy structure presents an extraordinary flexibility in the design, since it allows to customize the photovoltaic modules to be installed (opaque, transparent, colored, etc).

This photovoltaic canopy structure also offers the possibility of integrating different services, such as the charging of electric vehicles, the incorporation of lighting, or the option of including advertisements, among others.




## PHOTOVOLTAIC SOLAR ENERGY MOUNTING - CANOPY - SI-ESF-S-CANOPY

### SUPPORT STRUCTURE

CHARACTERISTICS		
<b>Materials</b>	Structure	Steel
	Screws	Galvanized steel
<b>Finish</b>	Type	Lacquered in color to choose or galvanized
<b>Warranty</b>	Time	15 years
<b>Occupied area</b>	Dimensions	5 x 5 m
<b>Occupied area</b>	Dimensions	25 m <sup>2</sup>
<b>Height</b>	Minimum	2.10 m
	Maximum	2.70 m
<b>Inclination</b>	Angle	1°
<b>Maximum load</b>	Wind	105 km/h
<b>Photovoltaic modules</b>	Orientation	Vertical
	Matrix	3 x 5 = 15 units
<b>Power</b>	Total	280 Wp x 15 units = 4,200 Wp

NORMATIVE	
<b>Rolled steel and reinforced</b>	CTE-DB-SE-A
	ISO 1461:1999
<b>Foundation</b>	EHE 98-CTE
<b>Wind</b>	CTE-DB-SE-A
<b>Snow</b>	CTE-DB-SE-A
<b>Earthquake</b>	NCSE-02
<b>Eurocode 1</b>	Norm UNE-ENV 1991-2-4:1998. Project bases and actions in structures. Part 2-4: Actions in structures. Wind actions.
<b>Basic building rule</b>	Steel structures in buildings (NBE/EA-95)
	Actions in the building (NBE/AE-88)
<b>Technological Regulation of the building</b>	Structures. Wind loads (NTE ECV)

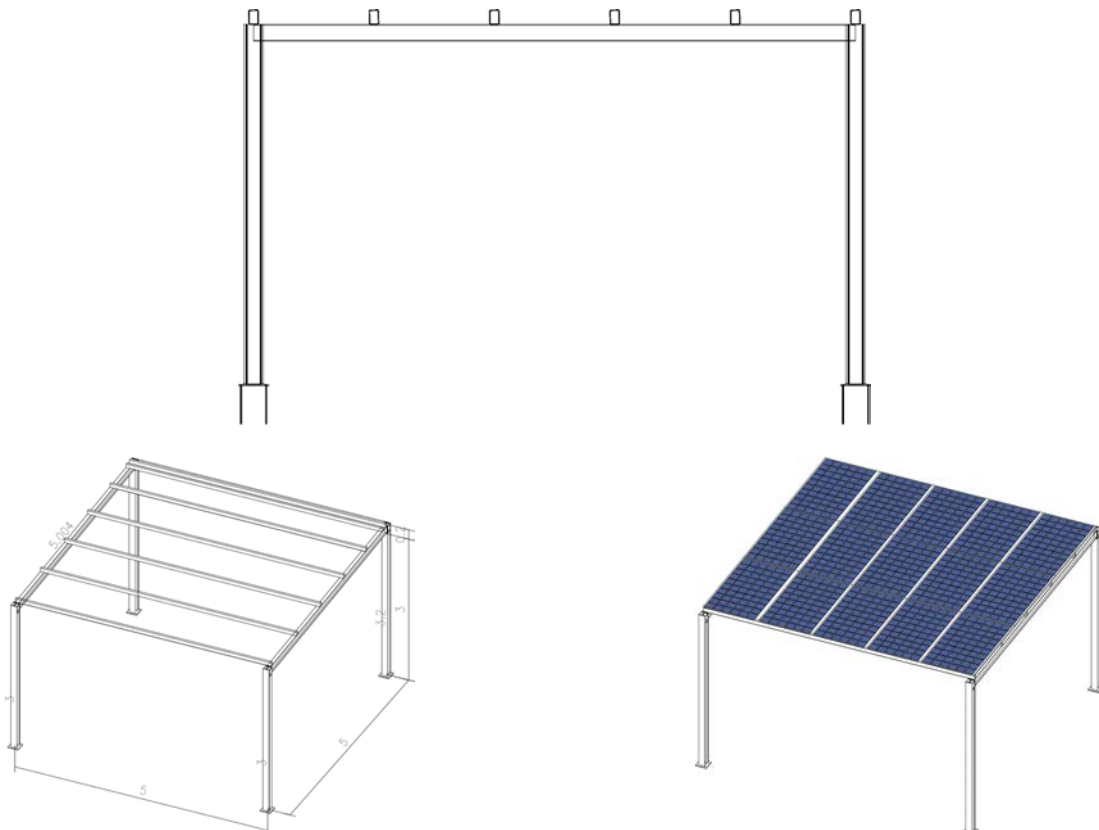




## PHOTOVOLTAIC SOLAR ENERGY MOUNTING - CANOPY - SI-ESF-S-CANOPY

### PHOTOVOLTAIC MODULES

ELECTRICAL CHARACTERISTICS (STC)		
Maximum power (Pmpp)	Wp	280
Tolerance	Wp	0 ~ + 5
Voltage at maximum power (Vmpp)	Volts	32.20
Current at maximum power (Impp)	Amperes	8.70
Open circuit voltage (Voc)	Volts	38.20
Short circuit current (Isc)	Amperes	9.51
Maximum system voltage (Vsyst)	Volts	600 (UL) / 1,500 (IEC)
Diodes (By-pass)	Quantity	6
Maximum series fuse	Amperes	15
Efficiency (ηm)	%	17.2
Form Factor	%	≥ 73

MECHANICAL CHARACTERISTICS			
Size	Height	1,665 mm	65.55 inches
	Width	1,000 mm	39.37 inches
	Thickness	40 mm	1.57 inches
Weight	Net	23 kg	50.71 lbs
Frame	Material	Anodized aluminum AL6063-T5, minim 15 μm	
Front	Material	High transmissivity toughened glass	
	Thickness	2.5 ± 0,2 mm	0.13 inches
Cells	Type	Polycrystalline	
	Quantity	6 x 10 units	
	Size	156.75 x 156.75 mm	5 inches
Serial connection	Quantity	60 units	
Parallel connection	Quantity	1 unit	
Encapsulation	Material	EVA	
	Thickness	0.50 ± 0.03 mm	0.020 ± 0.0012 inches
Rear	Material	Tempered glass	
	Thickness	2.5 ± 0.2 mm	0.13 inches
Junction box	Material	PVC	
	Protection	IP67	
	Isolation	Versus humidity and inclement weather	
Cables	Type	Polarized and symmetric in length	
	Length	450 mm	17.72 inches
	Section	4 mm <sup>2</sup>	0.006 inches <sup>2</sup>
	Features	Low contact resistance Minimal losses for voltage drop	
Connectors	Material	PVC	
	Type	MC4	
	Protection	IP67	

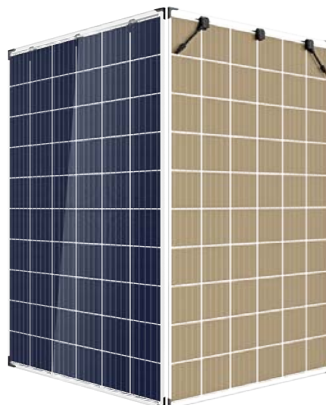



## PHOTOVOLTAIC SOLAR ENERGY MOUNTING - CANOPY - SI-ESF-S-CANOPY

