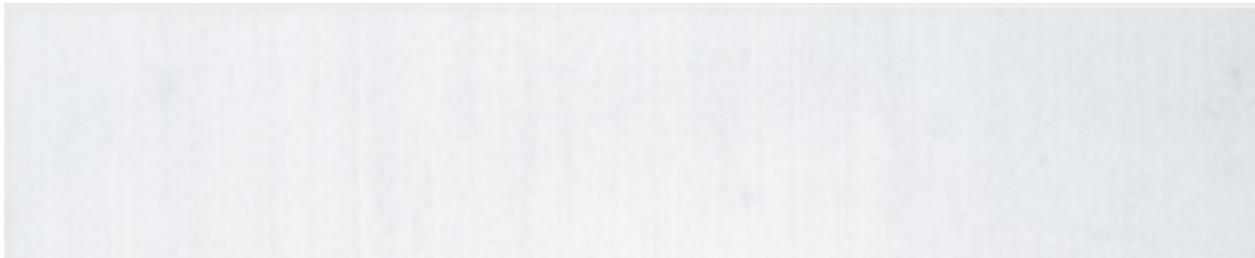


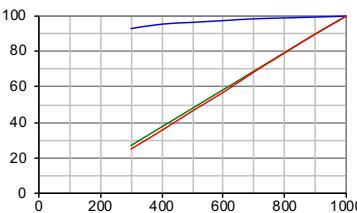
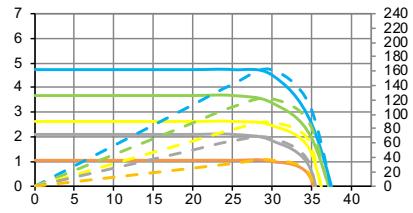
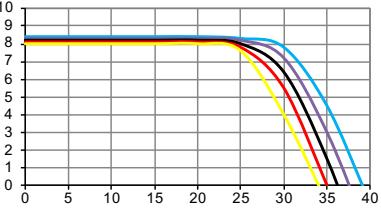
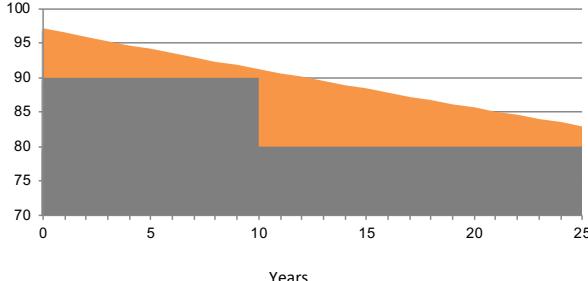


MANUFACTURER									
	SOLAR INNOVA GREEN TECHNOLOGY, S.L.								
	N.I.F.: ESB-54.627.278	Paseo de los Molinos, 12	T/F: +34965075767	E: info@solarinnova.net	W: www.solarinnova.net				
PHOTOVOLTAIC MODULES									
Series	BIPV-COLORED-METALS	Reference	BIPV-CL-ME-04-M158-60	Type	MONOCRYSTALLINE				
INTRODUCTION									
									
	MATERIALS	Solar Innova uses the latest materials to manufacture photovoltaic modules.							
	USE	Our modules are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution.							
	FRONT	The front of the module contains a tempered solar glass with:							
		<ul style="list-style-type: none"> □ High transmissivity. □ Low reflectivity. □ Low iron content. 							
	PV CELLS	These PV modules use high-efficiency monocrystalline silicon cells (the cells are made of a single crystal of high purity silicon) to transform the energy of sunlight into electric energy.							
		Each cell is electrically rated to optimize the behavior of the module.							
		Its performance is excellent over the entire range of light spectrum, with particularly high yields in low light situations or cloudiness to direct sunlight (diffuse radiation).							
	ENCAPSULANT	The cell circuit is laminated using as encapsulant:							
		<ul style="list-style-type: none"> □ PVB (Polivinil Butiral). 							
	BACK	The rear of the module contains a tempered glass which provides complete protection and seals against environmental agents and electrical insulation.							
	JUNCTION BOX	The junction boxes with IP67, are made from high temperature resistant plastics and containing terminals, connection terminals and protection diodes (by-pass).							
PERFORMANCE									
Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.									
QUALITY CONTROL									
We have quality control divided into three elements:									
<ul style="list-style-type: none"> □ Regular inspections allow us to guarantee the quality of the raw material. □ Quality control in the process of our manufacturing procedures. □ Quality control of finished products, we conduct through inspections and tests of reliability and performance. 									
WARRANTIES									
Our manufacturing plants have been prepared in accordance with:									
<ul style="list-style-type: none"> □ ISO 9001, in terms of Quality Systems and Business. □ ISO 14001, in terms of Environmental Management Systems. □ ISO 45001, in terms of Management Systems Health and Safety. 									
CERTIFICATES									
Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.									
									
Page 1/4									

MANUFACTURER						
	SOLAR INNOVA GREEN TECHNOLOGY, S.L.	N.I.F.: ESB-54.627.278	T/F: +34965075767	E: info@solarinnova.net	W: www.solarinnova.net	
Paseo de los Molinos, 12	03660 - NOVELDA (Alicante) SPAIN					
PHOTOVOLTAIC MODULES						
Series	BIPV-COLORED-METALS	Reference	BIPV-CL-ME-04-M158-60	Type	MONOCRYSTALLINE	
	PV CELLS					
ELECTRICAL CHARACTERISTICS						
Type	Monofacial		sc-Si			
MECHANICAL CHARACTERISTICS			TEMPERATURE COEFFICIENTS			
Size	mm	158,75 x 158,75 ±0,5	Tk Voltage	%/K	-0,36	
Thickness	µm	210 ±20	Tk Current	%/K	0,07	
Front	[-]	Si3N4 anti-reflection coating	Tk Power	%/K	-0,38	
Back	[+]	Aluminum back surface field (Al-BSF)				
PV MODULES						
	ELECTRICAL CHARACTERISTICS					
STC CONDITIONS						
Maximum power	[Pmpp]	Wp	163		±3% (*)	
Power selection	[Pmpp]	%	±3			
Voltage at maximum power	[Vmpp]	V	34,44		IEC 60904-1	
Current at maximum power	[Impp]	A	4,73		IEC 60904-3	
Open circuit voltage	[Voc]	V	40,64		±3% (*)	
Short circuit current	[Isc]	A	5,01		±4% (*)	
Maximum system voltage	[Vsyst]	V	1500 / 1000		IEC / UL	
Maximum series fuse rating	[Icf]	A	15			
Efficiency	[ηm]	%	9,12			
Form Factor	[FF]	%	79,95			
STC (Standard Test Conditions):	Irradiance: 1000 W/m ² + Cell Temperature: 25° C + Air Mass: 1.5					
	* (Considering LID, the power range of the certification authority)					
NMOT CONDITIONS						
Maximum power	[Pmpp]	Wp	120		IEC 61215	
Voltage at maximum power	[Vmpp]	V	31,36			
Current at maximum power	[Impp]	A	3,84			
Open circuit voltage	[Voc]	V	37,14			
Short circuit current	[Isc]	A	4,06			
NMOT (Nominal Module Operating Temperature):	Irradiance: 800 W/m ² + Ambient Temperature: 20° C + Air Mass: 1.5 + Wind Speed: 1 m/s					
MECHANICAL CHARACTERISTICS						
PANEL	WIDTH (X)	HIGH (Y)	DIAGONAL	AREA	POWER/AREA	
Size - Glass-1	1050	x	1700 mm		1,79 m ²	91 Wp/m ²
Size - Glass-2	1050	x	1700 mm		1,79 m ²	
CELLS						
Size	158,75	x	158,75 mm	210 mm	0,03 m ²	
Distance - Top			47 mm			
Distance - between Cells	2	x	2 mm			
Distance - Left			44 mm			
Distance - Right			44 mm			
Distance - Bottom			47 mm			
Quantity	6	x	10	= 60 units	1,51 m ²	
COMPONENTS						
MATERIAL	QUANTITY	THICKNESS (Z)	DESCRIPTION	DENSITY	TOTAL WEIGHT	THERMAL RESISTANCE
Glass-1	1 units	4 mm	FTG-Uclear	10,12 kg/m ²	18,07 kg	0,1738 m ² K/W
Sheet Encapsulant	1 units	0,76 mm	PVB	0,81 kg/m ²	1,44 kg	0,0032 m ² K/W
Busbars	5 units	0,2 mm	SnAgCu	0,10 kg/m ²	0,15 kg	
PV Cells	60 units	0,21 mm	sc-Si	0,20 kg/m ²	0,30 kg	
Sheet Encapsulant	1 units	0,76 mm	PVB	0,81 kg/m ²	1,44 kg	0,0032 m ² K/W
Backsheet	1 units	0,5 mm	TPT-RAL 9005	0,47 kg/m ²	0,84 kg	0,0032 m ² K/W
Glass-2	1 units	4 mm	FTG	10,12 kg/m ²	18,07 kg	0,1738 m ² K/W
Junction Box	1 units	10 mm	PVC-IP68	0,10 kg/m ²	0,10 kg	
Diodes (By-pass)	5 units			0,01 kg/m ²	0,02 kg	
Cables (+/-)	2 units	4 mm ²	900 mm	0,10 kg/m ²	0,20 kg	
Connectors	2 units	MC4-T4 type	PVC-IP67	0,05 kg/m ²	0,10 kg	
TOTAL		10,23 mm		26,94 kg/m ²	40,74 kg	0,36 m ² K/W
THERMAL CHARACTERISTICS						
TEMPERATURE COEFFICIENTS			MONOCRYSTALLINE			
Temperature coefficient of short circuit current	α	[Isc]		0,0814	%/° C	
Temperature coefficient of open circuit voltage	β	[Voc]		-0,3910	%/° C	
Temperature coefficient of maximum power	γ	[Pmpp]		-0,5141	%/° C	
Temperature coefficient of current at maximum power		[Impp]		0,1000	%/° C	
Temperature coefficient of voltage at maximum power		[Vmpp]		-0,3800	%/° C	
Nominal Module Operating Temperature			[NMOT]	+ 47 ± 2	° C	
THERMAL TRANSMITTANCE (U)						
Ug-Value	2,80 W/m ² K	EN 673	G-Value	0,36 %		EN 410
UV TRANSMITTANCE						
UV-Value	0,00 %	300-380 nm	EN 410	R-Value	32(-1:-3)	EN 12758
VISIBLE LIGHT TRANSMISSION (LT)						
LT-Value	0,00 %	380-780 nm	EN 410	Opacity	100,00 %	CIE D65 ISO 9050
EXTERIOR REFLECTION (LRe)						
LRe-Value	8,00 %		EN 410	LRI-Value	15,00 %	EN 410
TOLERANCES						
Working temperature	- 40 / + 85 °C		Glass dimension	< ± 2,5 mm		EN 12543-5
Dielectric isolation voltage	3000 V		Glass symmetrytolerance	< ± 3 mm		EN 12543-5
Relative humidity	0 / 100 %		Cell single string distolerance	< ± 1 mm		EN 12543-6
Wind resistance	15345 Pa	1565 kg/m ²				IEC 61215
Snow resistance	15345 Pa	1565 kg/m ²	Maximum hail resistance	Ø 25	23 m/s	IEC 61215
Conductivity at ground	≤ 0,1 Ω		Resistance	≥ 100 Ω		
CLASSIFICATIONS						
Application class	A Class	IEC 61730	Pollution	Degree	1	IEC 61730
Electrical protection class	II Class	IEC 61140	Material	Group	I	IEC 61730
Fire safety class	A Class	ANSI/UL 790	Safety	Factors	1,5	IEC 61730
LAMINATED GLASS (EN 14449)						
Impact resistance	1B1 Class	EN 12600	High temperature		OK	EN 12543-4
Manual attack	P2A Class	EN 356	Humidity		OK	EN 12543-4

MANUFACTURER									
 SOLAR INNOVA GREEN TECHNOLOGY, S.L. N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN		T/F: +34965075767 E: info@solarinnova.net W: www.solarinnova.net							
PHOTOVOLTAIC MODULES									
Series	BIPV-COLORED-METALS	Reference	BIPV-CL-ME-04-M158-60	Type	MONOCRYSTALLINE				
DRAWING									
JUNCTION BOX									
Position	Front - Rear	■ Edge PANEL	■ Axis (X) -	■ Axis (Y) -					
FRONT 		REAR 		SECTION 					
PERFORMANCE									
CELLS									
TEMPERATURE			IRRADIANCE						
Temperature depending on Isc, Voc and Pmax			Irradiance depending on Isc, Voc and Pmax (cell temperature: 25° C)						
									
Cell temperature (° C)			Irradiance (W/m²)						
--- Pmax --- Voc --- Isc			--- Voc --- Isc --- Pmax						
PANELS									
TEMPERATURE			IV-IRRADIANCE						
Electrical performance (cell temperature: 25° C)									
									
Current (A)			Power (W)						
--- I-V 1000 W/m² --- P-I 1000 W/m² --- I-V 800 W/m² --- P-I 800 W/m² --- I-V 600 W/m² --- P-I 600 W/m² --- I-V 400 W/m² --- P-I 400 W/m² --- I-V 200 W/m² --- P-I 200 W/m²			--- I-V (-25°C) --- I-V (0°C) --- I-V (+25°C) --- I-V (+50°C) --- I-V (+75°C)						
SOLAR SIMULATOR									
Class	AAA	IEC 60904-9	Power measurement uncertainty is	± 3 %					
ELECTRICAL MEASURES									
STC CONDITIONS			NMOT CONDITIONS						
Irradiance	1000 W/m²	IEC 60904-1	Irradiance	800 W/m²	IEC 61215				
Cell temperature	25 °C	IEC 60904-3	Ambient temperature	20 °C					
Air Mass	1,5	ASTM G173	Air Mass	1,5	ASTM G173-03				
		ASTM 1036	Wind speed	1 m/s					
Page					3/4				

MANUFACTURER									
 <p>SOLAR INNOVA GREEN TECHNOLOGY, S.L. N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN</p>	T/F: +34965075767								
	E: info@solarinova.net		W: www.solarinova.net						
	PHOTOVOLTAIC MODULES								
	Series	BIPV-COLORED-METALS	Reference	BIPV-CL-ME-04-M158-60	Type	MONOCRYSTALLINE			
STANDARD GUARANTEES									
LINEAR PERFORMANCE WARRANTY									
									
Manufacturing defects 12 years. Performance 90 % of rated power after 12 years of operation, 80 % of rated power after 25 years of operation. Lifespan > 30 years.									
ENVIRONMENTAL INFORMATION									
Solar Hours Peak 6 day Irradiation rate 1000 W/ m ² Energy generated 0,98 kWh/ day 29 kWh/ month 357 kWh/ year		kWh	Coal	Petrol/Gas	Combined				
		1	0,961	0,828	0,372	kg/CO ₂			
		Avoided CO ₂ emissions	day	0,94	0,81	0,36 kg/CO ₂			
			month	28,17	24,27	10,90 kg/CO ₂			
			year	342,70	295,27	132,66 kg/CO ₂			
CERTIFICATES									
ISO 9001 Quality management systems. ISO 14001 Environmental management systems. ISO 45001 Occupational health and safety management systems. CE Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits. IEC/EN 61215 Crystalline silicon terrestrial photovoltaic (PV) modules. Design qualification and type approval. IEC/EN 61730-1 Photovoltaic (PV) module safety qualification - Part 1: Requirements for construction. IEC/EN 61730-2 Photovoltaic (PV) module safety qualification - Part 2: Requirements for testing. IEC 63092-1 Photovoltaics in buildings - Part 1: Requirements for building-integrated photovoltaic modules. UL 1703 Standard for Flat-Plate Photovoltaic Modules and Panels. EN 13501 Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests. EN 14449 Glass in building - Laminated glass and laminated safety glass - Evaluation of conformity/Product standard. EN 12543 Glass in building - Laminated glass and laminated safety glass. EN 12600 Glass in building - Pendulum test - Impact test method and classification for flat glass. EN 50583 Photovoltaics in buildings - Part 1: BIPV modules.									
     									
PACKING									
CONTAINER 20' PANELS X PALLET IEC 62759-1			CONTAINER 40'HQ PALLETS TOTAL						
PALLETS 85.41.43.00			TOTAL 26 22 572						
EXPORT INFORMATION HS Code 85.41.43.00 TARIc code 85.41.43.00									
REGISTER OF ELECTRICAL AND ELECTRONIC EQUIPMENT PRODUCERS									
WEEE 7378 Entity ECOASIMELEC									
DESCRIPTION									
Silicon cell photovoltaic solar module sc-Si, BIPV-Colored-Metals series, for architectural integration, from the manufacturer SOLAR INNOVA, maximum power (Wp) 162 W, voltage at maximum power (Vmp) 34,44 V, current at maximum power (Imp) 4,73 A, open-circuit voltage (Voc) 40,64 V, short-circuit current (Isc) 5,01 A, efficiency 9,12 %, composed of 60 cells, front layer tempered glass thick 4 mm, encapsulant layers of cells of PVB, back layer of tempered glass thick 4 mm, junction box (diodes, cables 4 mm ² , 900 mm and connectors MC4-T4), working temperature - 40 / + 85 °C, dimensions 1050 x 1700 x 10,23 mm, maximum wind load 15345 Pa, maximum snow load 15345 Pa, weight 40,74 kg.									
COMMENTS									
<hr/> <hr/> <hr/>									
NOTICE									
The specifications and technical data may be subject to possible modifications without notice. This data sheet are conform to the requirements of the Standard EN 50380. Images for illustration purposes only.									
Page 4/4									