

**MANUFACTURER**

SOLAR INNOVA GREEN TECHNOLOGY, S.L.  
N.I.F.: ESB-54.627.278  
Paseo de los Molinos, 12  
03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767  
E: info@solarinnova.net  
W: www.solarinnova.net

**PHOTOVOLTAIC MODULES****Series**

BIPV-COLORS-TOTAL

**Reference**

BIPV-CL-TO-RAL-5017-M158-60

**Type**

MONOCRYSTALLINE

**INTRODUCTION****MATERIALS**

Solar Innova uses the latest materials to manufacture photovoltaic modules.

**USE**

Our modules are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution.

**FRONT**

The front of the module contains a tempered solar glass with:

- High transmissivity.
- Low reflectivity.
- Low iron content.

**PV CELLS**

These PV modules use high-efficiency monocrystalline silicon cells (the cells are made of a single crystal of high purity silicon) to transform the energy of sunlight into electric energy.

Each cell is electrically rated to optimize the behavior of the module.

Its performance is excellent over the entire range of light spectrum, with particularly high yields in low light situations or cloudiness to direct sunlight (diffuse radiation).

**ENCAPSULANT**

The cell circuit is laminated using as encapsulant:

- PVB (Polivinil Butiral).

**BACK**

The rear of the module contains a tempered glass which provides complete protection and seals against environmental agents and electrical insulation.

**JUNCTION BOX**

The junction boxes with IP67, are made from high temperature resistant plastics and containing terminals, connection terminals and protection diodes (by-pass).

These modules are supplied with symmetric lengths of cable, with a diameter of copper section of 4 mm and an extremely low contact resistance, all designed to achieve the minimum voltage drop losses.

**PERFORMANCE**

Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.

**QUALITY CONTROL**

We have quality control divided into three elements:

- Regular inspections allow us to guarantee the quality of the raw material.
- Quality control in the process of our manufacturing procedures.
- Quality control of finished products, we conduct through inspections and tests of reliability and performance.

**WARRANTIES**

Our manufacturing plants have been prepared in accordance with:

- ISO 9001, in terms of Quality Systems and Business.
- ISO 14001, in terms of Environmental Management Systems.
- ISO 45001, in terms of Management Systems Health and Safety.

**CERTIFICATES**

Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.

MANUFACTURER									
 <p>SOLAR INNOVA GREEN TECHNOLOGY, S.L. N.I.F.: ESB-54.627.278 Paseo de los Molinos, 12 03660 - NOVELDA (Alicante) SPAIN</p>	PHOTOVOLTAIC MODULES								
	Series BIPV-COLORS-TOTAL			Reference BIPV-CL-TO-RAL-5017-M158-60	Type MONOCRYSTALLINE				
	PV CELLS			sc-Si					
	Type Monofacial								
<b>MECHANICAL CHARACTERISTICS</b>				<b>TEMPERATURE COEFFICIENTS</b>					
Size	mm	158,75 x 158,75 ±0,5	Tk Voltage	%/K	-0,36				
Thickness	µm	210 ±20	Tk Current	%/K	0,07				
Front	[ - ]	Si3N4 anti-reflection coating	Tk Power	%/K	-0,38				
Back	[ + ]	Aluminum back surface field (Al-BSF)							
<b>PV MODULES</b>									
<b>ELECTRICAL CHARACTERISTICS</b>									
<b>STC CONDITIONS</b>									
Maximum power	[Pmpp]	Wp	332	±3% (*)					
Power selection	[Pmpp]	Wp	0/+5						
Voltage at maximum power	[Vmpp]	V	41,33	IEC 60904-1					
Current at maximum power	[Impp]	A	8,04	IEC 60904-3					
Open circuit voltage	[Voc]	V	48,77	±3% (*)					
Short circuit current	[Isc]	A	8,52	±4% (*)					
Maximum system voltaje	[Vsyst]	V	1500 / 1000	IEC / UL					
Maximum series fuse rating	[Icf]	A	15						
Efficiency	[ηm]	%	16,20						
Form Factor	[FF]	%	79,95						
STC (Standard Test Conditions):	Irradiance: 1000 W/m <sup>2</sup> + Cell Temperature: 25° C + Air Mass: 1.5								
	* (Considering LID, the power range of the certification authority)								
<b>NMOT CONDITIONS</b>									
Maximum power	[Pmpp]	Wp	245	IEC 61215					
Voltage at maximum power	[Vmpp]	V	37,63						
Current at maximum power	[Impp]	A	6,53						
Open circuit voltage	[Voc]	V	44,57						
Short circuit current	[Isc]	A	6,91						
NMOT (Nominal Module Operating Temperature):	Irradiance: 800 W/m <sup>2</sup> + Ambient Temperature: 20° C + Air Mass: 1.5 + Wind Speed: 1 m/s								
<b>MECHANICAL CHARACTERISTICS</b>									
<b>PANEL</b>	WIDTH (X)	HIGH (Y)	DIAGONAL	AREA	POWER/AREA				
Size - Glass-1	1000	x	2050 mm	2,05 m <sup>2</sup>	162 Wp/m <sup>2</sup>				
Size - Glass-2	1000	x	2050 mm	2,05 m <sup>2</sup>					
<b>CELLS</b>									
Size	158,75	x	158,75 mm	210 mm	0,03 m <sup>2</sup>				
Distance - Top			62 mm						
Distance - between Cells	2	x	2 mm						
Distance - Left			19 mm						
Distance - Right			19 mm						
Distance - Bottom			62 mm						
Quantity	6	x	12 =	72 units	1,81 m <sup>2</sup>				
<b>COMPONENTS</b>									
<b>MATERIAL</b>	<b>QUANTITY</b>	<b>THICKNESS (Z)</b>	<b>DESCRIPTION</b>	<b>DENSITY</b>	<b>TOTAL WEIGHT</b>				
Glass-1-RAL-5017	1 units	4 mm	Tempered	10,12 kg/m <sup>2</sup>	20,75 kg				
Sheet Encapsulant	1 units	0,76 mm	PVB	0,81 kg/m <sup>2</sup>	1,66 kg				
Busbars	5 units	0,2 mm	CuSn6	0,10 kg/m <sup>2</sup>	0,18 kg				
PV Cells	72 units	0,21 mm	sc-Si	0,20 kg/m <sup>2</sup>	0,36 kg				
Sheet Encapsulant	1 units	0,76 mm	PVB	0,81 kg/m <sup>2</sup>	1,66 kg				
Glass-2	1 units	4 mm	Tempered	10,12 kg/m <sup>2</sup>	20,75 kg				
Junction Box	1 units	10 mm	PVC-IP68	0,10 kg/m <sup>2</sup>	0,10 kg				
Diodes (By-pass)	6 units			0,01 kg/m <sup>2</sup>	0,02 kg				
Cables (+/-)	2 units	4 mm <sup>2</sup>	900 mm	0,10 kg/m <sup>2</sup>	0,20 kg				
Connectors	2 units	MC4-T4 type	PVC-IP67	0,05 kg/m <sup>2</sup>	0,10 kg				
<b>TOTAL</b>		9,73 mm		25,23 kg/m <sup>2</sup>	<b>45,79 kg</b>				
<b> THERMAL CHARACTERISTICS</b>									
<b> TEMPERATURE COEFFICIENTS</b>				<b>MONOCRYSTALLINE</b>					
Temperature coefficient of short circuit current	α	[Isc]		0,0814	%/° C				
Temperature coefficient of open circuit voltage	β	[Voc]		-0,3910	%/° C				
Temperature coefficient of maximum power	γ	[Pmpp]		-0,5141	%/° C				
Temperature coefficient of current at maximum power		[Impp]		0,1000	%/° C				
Temperature coefficient of voltage at maximum power		[Vmpp]		-0,3800	%/° C				
Nominal Module Operating Temperature		[NMOT]		+ 47 ± 2	° C				
<b>TOLERANCES</b>									
Working temperature	- 40 / + 85 °C		Glass dimension	< ± 2,5 mm	EN 12543-5				
Dielectric isolation voltage	3000 V		Glass symmetry tolerance	< ± 3 mm	EN 12543-5				
Relative humidity	0 / 100 %		Cell single string distolerance	< ± 1 mm	EN 12543-6				
Wind resistance	2400 Pa	245 kg/m <sup>2</sup>			IEC 61215				
Snow resistance	5400 Pa	551 kg/m <sup>2</sup>	Maximum hail resistance	Ø 35	97 m/s	IEC 61215			
Conductivity at ground	≤ 0,1 Ω		Resistance	≥ 100 Ω					
<b>CLASSIFICATIONS</b>									
Application class	A Class	IEC 61730	Pollution	Degree	1	IEC 61730			
Electrical protection class	II Class	IEC 61140	Material	Group	I	IEC 61730			
Fire safety class	A Class	ANSI/UL 790 IEC 61730	Safety	Factors	1,5	IEC 61730			

MANUFACTURER							
<b>SOLAR INNOVA</b>		SOLAR INNOVA GREEN TECHNOLOGY, S.L.					
N.I.F.: ESB-54.627.278		T/F: +34965075767					
Paseo de los Molinos, 12		E: info@solarinnova.net					
03660 - NOVELDA (Alicante) SPAIN		W: www.solarinnova.net					
PHOTOVOLTAIC MODULES							
Series	BIPV-COLORS-TOTAL	Reference	BIPV-CL-TO-RAL-5017-M158-60	Type	MONOCRYSTALLINE		
DRAWING							
JUNCTION BOX							
Position	[Front] - [Rear]	■ Border	- [Axis (X)] ■ [Axis (Y)] -				
FRONT							
REAR							
mm							
WIDTH (X)							
1000 mm							
PERFORMANCE							
CELLS							
TEMPERATURE			IRRADIANCE				
Temperature depending on Isc, Voc and Pmax			Irradiance depending on Isc, Voc and Pmax (cell temperature: 25°C)				
Isc, Voc, Pmax normalized (%)							
Cell temperature (°C)			Irradiance (W/m²)				
--- Pmax	--- Voc	--- Isc	--- Voc	--- Isc	--- Pmax		
PANELS							
TEMPERATURE			IV-IRRADIANCE				
Electrical performance (cell temperature: 25°C)							
Current (A)							
Voltage (V)			Voltage (V)				
---- I-V 1000 W/m²	---- P-I 1000 W/m²		---- I-V (-25°C)	---- I-V (0°C)	---- I-V (+25°C)		
---- I-V 800 W/m²	---- P-I 800 W/m²		---- I-V (+50°C)	---- I-V (+75°C)			
---- I-V 600 W/m²	---- P-I 600 W/m²						
---- I-V 400 W/m²	---- P-I 400 W/m²						
---- I-V 200 W/m²	---- P-I 200 W/m²						
SOLAR SIMULATOR							
Class	AAA	IEC 60904-9	Power measurement uncertainty is ± 3 %				
ELECTRICAL MEASURES							
STC CONDITIONS			NMOT CONDITIONS				
Irradiance	1000 W/m²	IEC 60904-1	Irradiance	800 W/m²	IEC 61215		
Cell temperature	25 °C	IEC 60904-3	Ambient temperature	20 °C			
Air Mass	1,5	ASTM G173	Air Mass	1,5	ASTM G173-03		
		ASTM 1036	Wind speed	1 m/s			
Page 3/4							



SOLAR INNOVA GREEN TECHNOLOGY S.L. MANUFACTURER

N.I.F.: ESB-54.627.278  
Paseo de los Molinos, 12  
03660 - NOVELDA (Alicante) SPAIN

T/F: +34965075767  
E: info@solarinnova.net  
W: www.solarinnova.net




## PHOTOVOLTAIC MODULES

Series	BIPV-COLORS-TOTAL	Reference	BIPV-CL-TO-RAL-5017-M158-60	Type	MONOCRYSTALLINE
--------	-------------------	-----------	-----------------------------	------	-----------------

#### **STANDARD GUARANTEES**

#### **LINEAR PERFORMANCE WARRANTY**

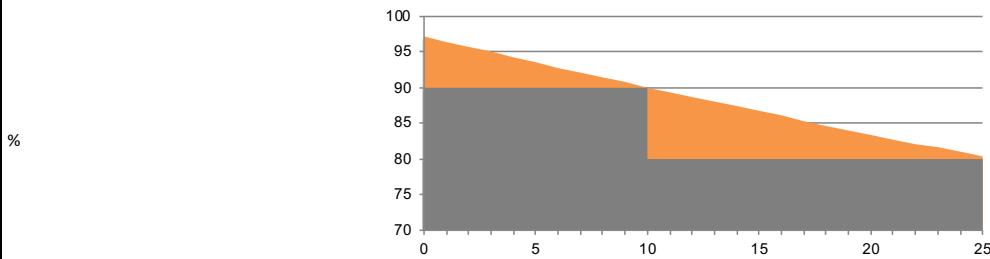

	Years		
<b>Manufacturing defects</b>	12 years.		
<b>Performance</b>	90 %	of rated power after	12 years of operation,
	80 %	of rated power after	25 years of operation.
<b>Lifespan</b>	> 20 years		

ENVIRONMENTAL INFORMATION

## CERTIFICATES

<b>ISO 9001</b>	Quality management systems.
<b>ISO 14001</b>	Environmental management systems.
<b>ISO 45001</b>	Occupational health and safety management systems.
<b>CE</b>	Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits.
<b>IEC/EN 61215</b>	Crystalline silicon terrestrial photovoltaic (PV) modules. Design qualification and type approval.
<b>IEC/EN 61730-1</b>	Photovoltaic (PV) module safety qualification - Part 1: Requirements for construction.
<b>IEC/EN 61730-2</b>	Photovoltaic (PV) module safety qualification - Part 2: Requirements for testing.
<b>IEC/EN 61701</b>	Salt mist corrosion testing of photovoltaic (PV) modules.
<b>IEC/EN 62716</b>	Photovoltaic (PV) modules - Ammonia corrosion testing.
<b>UNE-EN IEC 62804-1</b>	Photovoltaic (PV) Modules - Test Methods for the detection of potential-induced degradation. Part 1: Crystalline silicone.
<b>IEC/EN 62790</b>	Junction boxes for photovoltaic modules - Safety requirements and tests.
<b>IEC/EN 62852</b>	Connectors for DC-application in photovoltaic systems - Safety requirements and test.
<b>IUL 1703</b>	Standard for Flat-Plate Photovoltaic Modules and Panels



PACKING

PANELS X PALLET	CONTAINER 20' PALLETS	TOTAL	PANELS X PALLET	CONTAINER 40'HQ PALLETS	TOTAL
-	-	-	26	22	572

IEC 62759-1 Photovoltaic (PV) modules - Transportation testing - Part 1: Transportation and shipping of module package units.

## **EXPORT INFORMATION**

**HS Code** 85414020 **TARIC code** 8541409021

REGISTER OF ELECTRICAL AND ELECTRONIC EQUIPMENT PRODUCERS

## Entity

**DESCRIPTION**  
Silicon cell photovoltaic solar module sc-Si from the manufacturer SOLAR INNOVA, BIPV-Colored-Total series, maximum power (Wp) 332 W, voltage at maximum power (Vm<sub>p</sub>) 41,33 V, current at maximum power (I<sub>m</sub>p) 8,04 A, open-circuit voltage (V<sub>oc</sub>) 48,77 V, short-circuit current (I<sub>sc</sub>) 8,52 A, efficiency 16,20 %, composed of 72 cells, front layer tempered glass thick 4 mm, encapsulant layers of cells of PVB, back layer of tempered glass thick 4 mm, junction box (diodes, cables 4 mm<sup>2</sup>, 900 mm and connectors MC4-T4), operating temperature -40 °C / +55 °C, dimensions 1200 x 3050 x 3,7 mm, weight 12100 g, mounting brackets 15400 g, weight 15,72 kg.

COMMENTS

**NOTICE**

This data sheet are conform to the requirements of the Standard EN 50380.

Page 4/4